



Measurements




Page 1-3

Working loads for Sliding Supports LA, LC and LD - HV




Page 1-4

Working loads for Supports with insulation insert and




Page 1-6

Sliding Support LA - HV




Page 1-7

Sliding Support LC - HV




Page 1-9

Sliding Support LD - HV




Page 1-11

Sliding Support LK - HV 150




Page 1-12

Guiding Set FS




Page 1-13

Fixed Point Set XS




Page 1-14

Guiding Set FS Z




Page 1-15

Sliding Support LU - H 40




Page 1-16

Guided Support FR - H 40






Page 1-17

Fixed Point XR - H 40



Page 1-18

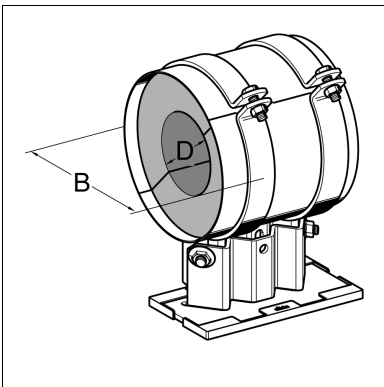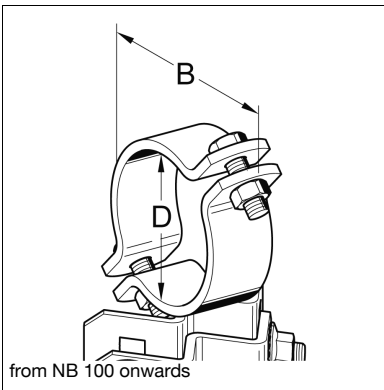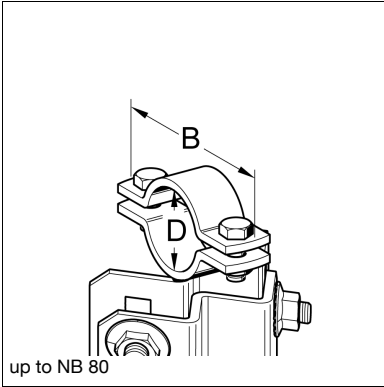


Measurements

Supports without insulation insert


Pipe NB	Pipe D	Pipe Clamp B [mm]	Pipe Clamp Material [mm]	Hex. bolts
25	34	100	30 x 5	M10 x 40
32	43	111	30 x 5	M10 x 40
40	49	117	30 x 5	M10 x 40
50	61	139	40 x 5	M12 x 45
65	77	156	40 x 5	M12 x 45
80	89	168	40 x 5	M12 x 45
100	115	165	50 x 5	M12 x 50
125	140	183	50 x 5	M12 x 50
150	169	215	50 x 8	M12 x 55
200	220	252	50 x 8	M12 x 55
250	273	306	60 x 8	M16 x 65
300	324	347	60 x 8	M16 x 65
350	356	375	60 x 8	M16 x 65
400	407	423	70 x 8	M16 x 65
500	508	524	70 x 8	M16 x 65
600	610	626	70 x 8	M16 x 65

Supports with insulation insert

Pipe NB	Pipe D	Insulation Thickness [mm]	Insulation Length [mm]	Pipe Clamp B [mm]	Pipe Clamp Material [mm]	Hex. bolts
25	33.7	50	100	180	50 x 5	M12 x 50
32	42.4	50	100	187	50 x 5	M12 x 50
40	48.3	50	100	190	50 x 5	M12 x 50
50	60.3	50	100	199	50 x 5	M12 x 50
65	76.1	60	100	237	50 x 8	M12 x 55
80	88.9	60	100	245	50 x 8	M12 x 55
100	114.3	60	200	278	50 x 8	M16 x 60
125	139.7	60	200	295	50 x 8	M16 x 60
150	168.3	60	200	319	60 x 8	M16 x 65
200	219.1	60	200	363	60 x 8	M16 x 65
250	273.0	60	200	412	60 x 8	M16 x 65
300	323.9	80	200	503	70 x 8	M16 x 65

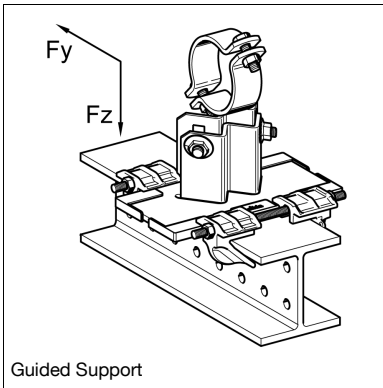

Guided Support

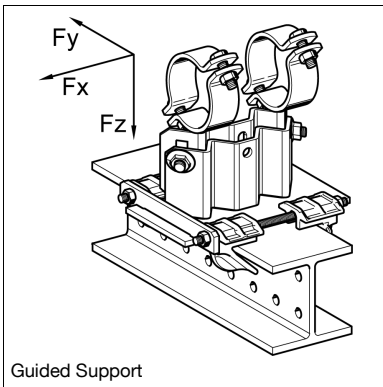

Guided Support

Working loads for Sliding Supports LA, LC and LD - HV

Basis for assessment EC 3, working loads for Supports in delivery status

Sliding Support LA - HV + Guiding Set FS resp. Fixed Point Set XS


Height	DN	Fx	Fy	± Fz
		[kN] for Fixed Points only	[kN]	
90	25	9.1	5.2	15.4
90	32	8.8	4.9	15.4
90	40	8.6	4.8	15.4
90	50	8.2	4.4	15.4
90	65	7.7	3.9	15.4
90	80	7.3	3.6	15.4
90	100	6.5	2.8	15.4
90	125	5.7	2.1	15.4
90	150	4.7	1.3	15.4
150	25	8.0	4.2	15.4
150	32	7.9	3.9	15.4
150	40	7.8	3.9	15.4
150	50	7.6	3.6	15.4
150	65	7.4	3.2	15.4
150	80	7.2	3.0	15.4
150	100	6.9	2.5	15.4
150	125	6.5	2.0	15.4
150	150	6.1	1.4	15.4
200	25	6.3	3.6	15.4
200	32	6.2	3.5	15.4
200	40	6.2	3.4	15.4
200	50	6.0	3.2	15.4
200	65	5.9	3.0	15.4
200	80	5.7	2.8	15.4
200	100	5.5	2.4	15.4
200	125	5.2	2.0	15.4
200	150	4.9	1.6	15.4

Sliding Supports LC - HV + Guiding Set FS resp. Fixed Point Set XS

Height	DN	F _x [kN] for Fixed Points only	F _y [kN]	± F _z [kN]
90	25	14.3	6.3	17.0
90	32	14.1	6.2	17.0
90	40	14.0	6.1	17.0
90	50	13.9	5.9	17.0
90	65	13.6	5.6	17.0
90	80	13.5	5.4	17.0
90	100	13.1	5.0	17.0
90	125	12.7	4.5	17.0
90	150	12.3	4.0	17.0
90	200	11.6	3.2	17.0
90	250	10.8	2.3	17.0
90	300	10.1	1.5	17.0
150	25	8.5	4.9	17.0
150	32	8.5	4.8	17.0
150	40	8.5	4.7	17.0
150	50	8.4	4.6	17.0
150	65	8.4	4.4	17.0
150	80	8.4	4.3	17.0
150	100	8.3	4.0	17.0
150	125	8.3	3.7	17.0
150	150	8.2	3.3	17.0
150	200	8.1	2.7	17.0
150	250	8.0	2.1	17.0
150	300	7.9	1.5	17.0
200	25	7.3	5.3	17.0
200	32	7.2	5.2	17.0
200	40	7.2	5.1	17.0
200	50	7.1	4.9	17.0
200	65	7.0	4.7	17.0
200	80	6.9	4.6	17.0
200	100	6.7	4.3	17.0
200	125	6.5	4.0	17.0
200	150	6.3	3.6	17.0
200	200	5.9	3.0	17.0
200	250	5.5	2.3	17.0
200	300	5.1	1.7	17.0

Sliding Support LD - HV + 2 x Guiding Set FS resp. 2 x Fixed Point Sets XS

Height	DN	F _x [kN] for Fixed Points only	F _y [kN]	± F _z [kN]
90	350	25.0	13.1	32.8
90	400	22.5	11.9	32.8
90	500	20.8	9.4	32.8
90	600	10.3	7.2	32.8
150	350	25.0	12.9	32.8
150	400	22.5	11.5	32.8
150	500	17.3	8.8	32.8
150	600	8.7	6.3	32.8
200	350	25.0	11.3	32.8
200	400	20.5	10.2	32.8
200	500	15.7	8.1	32.8
200	600	7.5	6.1	32.8

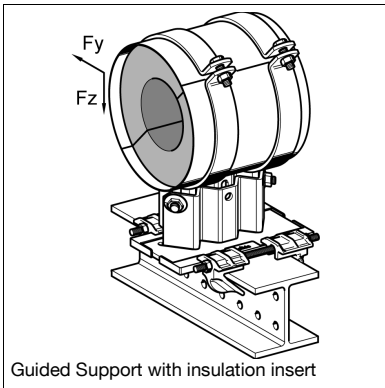


Working loads for Supports with insulation insert and suspension

Basis of assessment EC 3, working loads for Supports in delivery status


Sliding Supports LK - HV + Guiding Set FS

Height	DN	Fy [kN]	± Fz [kN]
150	25	3.1	3.1
150	32	3.8	3.8
150	40	4.3	4.3
150	50	4.0	3.9
150	65	2.8	2.8
150	80	2.5	2.4
150	100	4.5	17.0
150	125	4.1	17.0
150	150	3.6	17.0
150	200	2.8	17.0
150	250	1.9	17.0
150	300	0.4	17.0

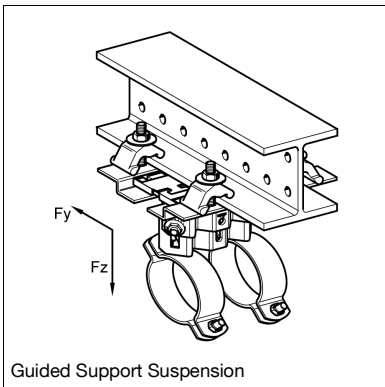


Sliding Supports LC - HV + Guiding Set FS Z


Height	DN	Fy [kN]	± Fz [kN]
90	25	5.0	10.0
90	32	4.8	10.0
90	40	4.7	10.0
90	50	4.5	10.0
90	65	4.2	10.0
90	80	4.0	10.0
90	100	3.6	10.0
90	125	3.3	10.0
90	150	3.1	10.0
90	200	2.7	10.0
90	250	2.3	10.0
90	300	1.5	10.0
150	25	3.2	10.0
150	32	3.1	10.0
150	40	3.1	10.0
150	50	3.0	10.0
150	65	2.8	10.0
150	80	2.8	10.0
150	100	2.6	10.0
150	125	2.4	10.0
150	150	2.3	10.0
150	200	2.0	10.0
150	250	1.7	10.0
150	300	1.3	10.0
200	25	2.5	10.0
200	32	2.4	10.0
200	40	2.4	10.0
200	50	2.3	10.0
200	65	2.2	10.0
200	80	2.2	10.0
200	100	2.1	10.0
200	125	2.0	10.0
200	150	1.9	10.0
200	200	1.7	10.0
200	250	1.5	10.0
200	300	1.1	10.0

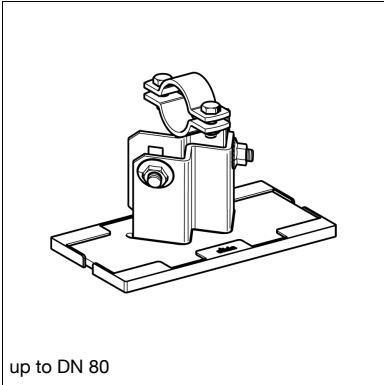

up to DN 80

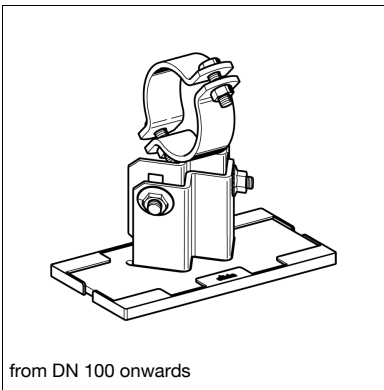

from DN 100 onwards

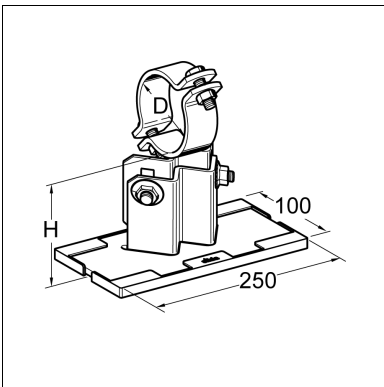

Sliding Support LA - HV

Application

Sliding Support - Single Clamp

For pipes on suitable surfaces. Height-adjustable in steps of 2.5mm. When resting on steel beams, a minimum flange width of 80 mm is recommended.

Configuration

Upper and lower part are bolted together allowing height adjustment. The slide plate is fixed to the lower part.

Technical Data

Type	Height H as delivered [mm]	Height H Range [mm]
LA - HV 90	90	88.5 ... 113.5
LA - HV 150	150	116 ... 168.5
LA - HV 200	200	171 ... 223.5

Material:

Metal plates: Steel, HCP

Bolts, Nuts: Steel, HCP

Slide Plate: Polyamide 6.0, glass fibre reinforced, black


Temperature range: -20 up to +130° C (at the slide plate)

Approvals




Note: HV 200 - minimum quantity and delivery time on request


Type	D (pipe) [mm]	W [kg]	Quantity [pack]	Part number
LA - HV 90 DN 25	33.7	2.8	1	110035
LA - HV 90 DN 32	42.4	2.9	1	110036
LA - HV 90 DN 40	48.3	2.9	1	110037
LA - HV 90 DN 50	60.3	3.1	1	110038
LA - HV 90 DN 65	76.1	3.2	1	110039
LA - HV 90 DN 80	88.9	3.3	1	110040
LA - HV 90 DN 100	114.3	3.6	1	110041
LA - HV 90 DN 125	139.7	3.7	1	110042
LA - HV 90 DN 150	168.3	4.7	1	110043
LA - HV 150 DN 25	33.7	3.2	1	110044
LA - HV 150 DN 32	42.4	3.2	1	110045
LA - HV 150 DN 40	48.3	3.2	1	110046
LA - HV 150 DN 50	60.3	3.4	1	110047
LA - HV 150 DN 65	76.1	3.6	1	110048
LA - HV 150 DN 80	88.9	3.6	1	110049
LA - HV 150 DN 100	114.3	3.9	1	110050
LA - HV 150 DN 125	139.7	4.0	1	110051
LA - HV 150 DN 150	168.3	5.1	1	110052
LA - HV 200 DN 25	33.7	3.5	1	110053
LA - HV 200 DN 32	42.4	3.5	1	110054
LA - HV 200 DN 40	48.3	3.6	1	110055
LA - HV 200 DN 50	60.3	3.7	1	110056
LA - HV 200 DN 65	76.1	3.9	1	110057
LA - HV 200 DN 80	88.9	3.9	1	110058
LA - HV 200 DN 100	114.3	4.2	1	110059
LA - HV 200 DN 125	139.7	5.3	1	110060
LA - HV 200 DN 150	168.3	5.4	1	110061

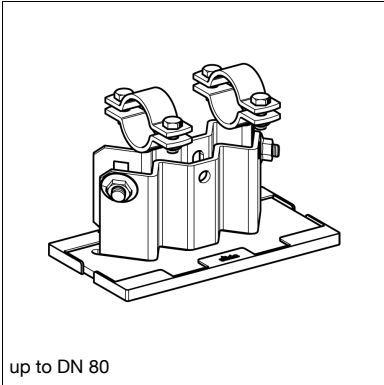

up to DN 80

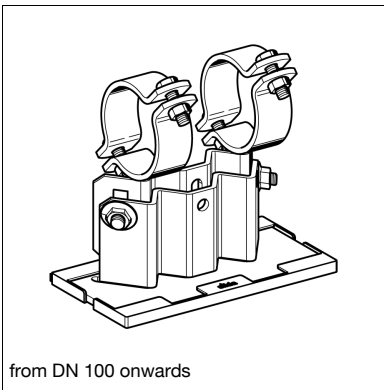

from DN 100 onwards

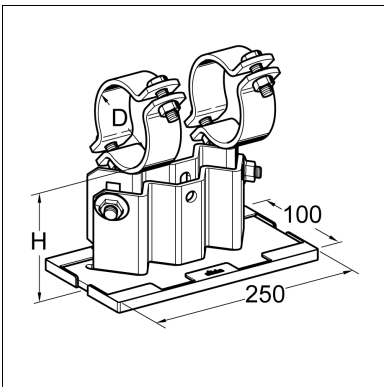

Sliding Support LC - HV

Application

Sliding Support - Double Clamp

For pipes on suitable surfaces. Height-adjustable in steps of 2.5 mm. When resting on steel beams, a minimum flange width of 80 mm is recommended.

Configuration

Upper and lower part are bolted together allowing height adjustment. The slide plate is fixed to the lower part.

Technical Data

Type	Height H as delivered [mm]	Height H range [mm]
LC - HV 90	90	88.5 ... 113.5
LC - HV 150	150	116 ... 168.5
LC - HV 200	200	171 ... 223.5

Material:

Metal parts: Steel, HCP

Bolts, Nuts: Steel, HCP

Slide plate: Polyamide 6.0, glass fibre reinforced, black



Temperature range: -20 up to +130° C (at the slide plate)

Approvals



Note: HV 200 - minimum quantity and delivery time on request

Type	D (pipe) [mm]	W [kg]	Quantity [pack]	Part number
LC - HV 90 DN 25	33.7	3.6	1	110062
LC - HV 90 DN 32	42.4	3.6	1	110063
LC - HV 90 DN 40	48.3	3.7	1	110064
LC - HV 90 DN 50	60.3	4.1	1	110065
LC - HV 90 DN 65	76.1	4.3	1	110066
LC - HV 90 DN 80	88.9	4.4	1	110067
LC - HV 90 DN 100	114.3	5.1	1	110068
LC - HV 90 DN 125	139.7	5.4	1	110069
LC - HV 90 DN 150	168.3	7.3	1	110070
LC - HV 90 DN 200	219.1	8.3	1	110071
LC - HV 90 DN 250	273.0	11.0	1	110072
LC - HV 90 DN 300	323.9	12.0	1	110073
LC - HV 150 DN 25	33.7	4.0	1	110074
LC - HV 150 DN 32	42.4	4.1	1	110075
LC - HV 150 DN 40	48.3	4.2	1	110076
LC - HV 150 DN 50	60.3	4.6	1	110077
LC - HV 150 DN 65	76.1	4.8	1	110078
LC - HV 150 DN 80	88.9	4.9	1	110079
LC - HV 150 DN 100	114.3	5.5	1	110080
LC - HV 150 DN 125	139.7	5.8	1	110081
LC - HV 150 DN 150	168.3	7.8	1	110082
LC - HV 150 DN 200	219.1	8.7	1	110083
LC - HV 150 DN 250	273.0	11.5	1	110084
LC - HV 150 DN 300	323.9	12.5	1	110085
LC - HV 200 DN 25	33.7	4.6	1	110086
LC - HV 200 DN 32	42.4	4.7	1	110087
LC - HV 200 DN 40	48.3	4.8	1	110088
LC - HV 200 DN 50	60.3	5.1	1	110089
LC - HV 200 DN 65	76.1	5.3	1	110090
LC - HV 200 DN 80	88.9	5.4	1	110091
LC - HV 200 DN 100	114.3	6.1	1	110092
LC - HV 200 DN 125	139.7	6.2	1	110093
LC - HV 200 DN 150	168.3	8.3	1	110094
LC - HV 200 DN 200	219.1	9.5	1	110095
LC - HV 200 DN 250	273.0	12.0	1	110096
LC - HV 200 DN 300	323.9	13.0	1	110097

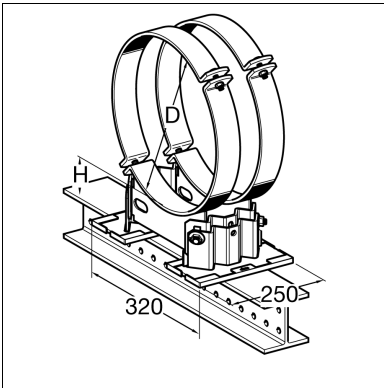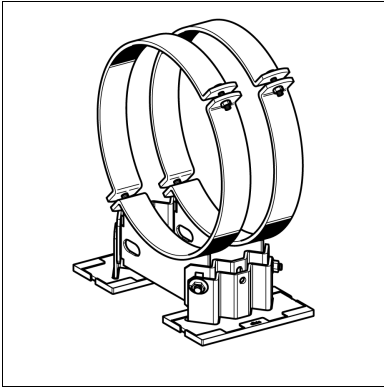

Sliding Support LD - HV

Application

Sliding Support - Dual Base

For pipes on suitable surfaces. Height-adjustable in steps of 2.5 mm. When resting on steel beams, a minimum flange width of 80 mm is recommended.

Configuration

The upper part and the two lower parts are bolted together allowing height adjustment. The slide plates are fixed to the lower parts.

Installation

To guarantee that both sliding plates rest correctly, both webs must be adjusted to exactly the same height.

Technical Data

Type	Height H as delivered [mm]	Height H range [mm]
LD - HV 90	90	88.5 ... 113.5
LD - HV 150	150	116 ... 168.5
LD - HV 200	200	171 ... 223.5

Material:

Metal parts: Steel, HCP

Bolts, Nuts: Steel, HCP

Slide plate: Polyamide 6.0, glass fibre reinforced, black


Temperature range: -20 up to +130° C (at the slide plates)

Approvals




Note: HV 200 - minimum quantity and delivery time on request


Type	D (pipe) [mm]	W [kg]	Quantity [pack]	Part number
LD - HV 90 DN 350	355.6	16.6	1	110098
LD - HV 90 DN 400	406.4	18.9	1	110099
LD - HV 90 DN 500	508.0	22.4	1	110100
LD - HV 90 DN 600	610.0	25.1	1	110101
LD - HV 150 DN 350	355.6	18.1	1	110102
LD - HV 150 DN 400	406.4	20.4	1	110103
LD - HV 150 DN 500	508.0	24.1	1	110104
LD - HV 150 DN 600	610.0	26.4	1	110105
LD - HV 200 DN 350	355.6	19.0	1	110106
LD - HV 200 DN 400	406.4	21.4	1	110107
LD - HV 200 DN 500	508.0	24.7	1	110108
LD - HV 200 DN 600	610.0	27.5	1	110109

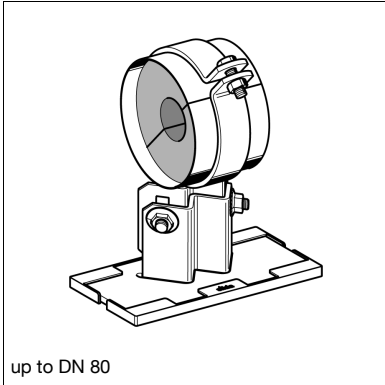

up to DN 80

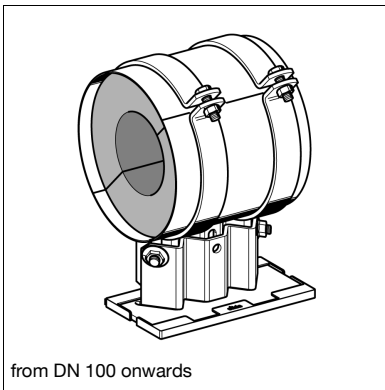

from DN 100 onwards

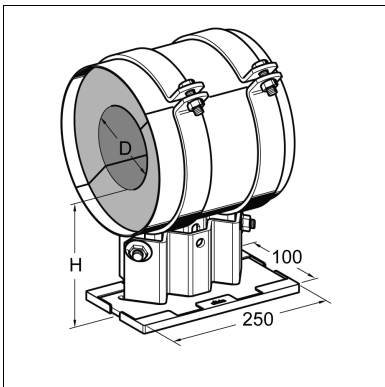

Sliding Support LK - HV 150

Application

Sliding Support with insulation
 With PUR insulation insert for pipes on suitable surfaces. Height-adjustable in steps of 2.5 mm. When resting on steel beams, a minimum flange width of 80 mm is recommended.

Configuration

Upper and lower part are bolted together allowing height adjustment. The slide plate is fixed to the lower part. Pipe Clamp, load spread metal sheet and insulation insert are pre-assembled.

Technical Data

NB	Form	Height H as delivered [mm]	Height H range [mm]
DN 25 - 50	Single clamp	150	137.5 ... 167.5
DN 65 - 80	Single clamp	150	147.5 ... 177.5
DN 100 - 250	Double clamp	150	150 ... 180
DN 300	Double clamp	150	150 ... 160


Material:

Metal parts: Steel, HCP
 Grub screws, nuts: Steel, HCP
 Slide plate: Polyamide 6.0, glass fibre reinforced, black
 Insulation insert: PUR, 200 kg/m³
 Load spread sheet: Aluminium (on request: Steel, galvanised, stainless steel)
 Temperature range: -30 up to +120° C

Approvals



Type	D (pipe) [mm]	W [kg]	Quantity [pack]	Part number
LK - HV 150 DN 25	33.7	4.6	1	110110
LK - HV 150 DN 32	42.4	4.8	1	110111
LK - HV 150 DN 40	48.3	5.5	1	110112
LK - HV 150 DN 50	60.3	5.9	1	110113
LK - HV 150 DN 65	76.1	6.2	1	110114
LK - HV 150 DN 80	88.9	6.6	1	110115
LK - HV 150 DN 100	114.3	12.0	1	110116
LK - HV 150 DN 125	139.7	13.9	1	110117
LK - HV 150 DN 150	168.3	14.5	1	110118
LK - HV 150 DN 200	219.1	16.6	1	110119
LK - HV 150 DN 250	273.0	18.6	1	110120
LK - HV 150 DN 300	323.9	24.2	1	110121

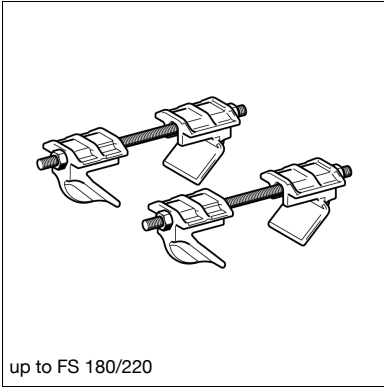

up to FS 180/220

Guiding Set FS


Application

Element for completing Guided Supports based on Sliding Supports.

Technical Data


Material:
 Metal sheets: Steel, HCP
 Grub screws, nuts: Steel, HCP
 Clamping Hooks: Cast iron, HCP

Approvals

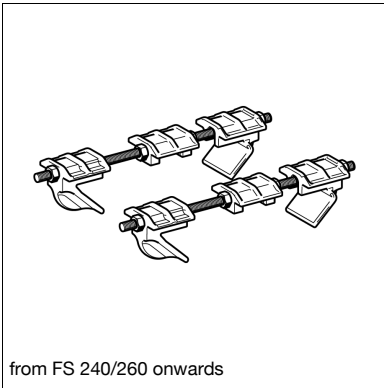



from FS 240/260 onwards

Type	W [kg]	Qty. [set]	Part number
FS 80/120	2.0	1	110350
FS 140/160	2.1	1	110351
FS 180/220	2.2	1	110352
FS 240/260	2.7	1	110353
FS 280/300	2.8	1	110354
FS F 80	0.8	1	110349

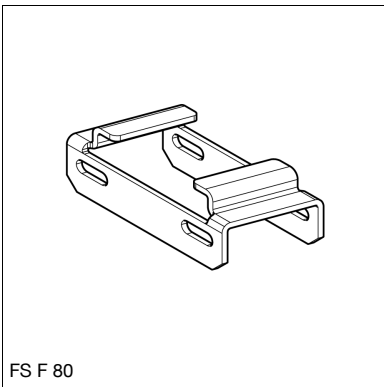

FS F 80

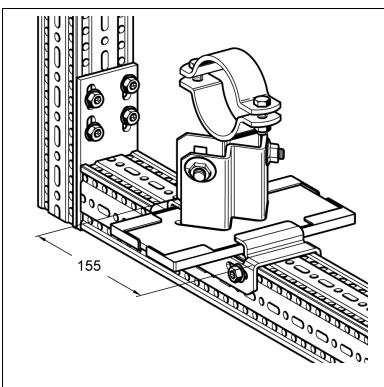

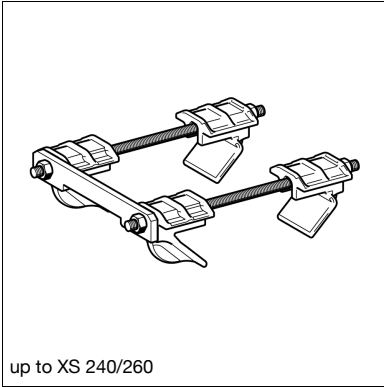

up to XS 240/260

Fixed Point Set XS


Application

For completing Fixed Points based on Sliding Supports. If used in combination with a Sliding Support, the Slide Plate has to be removed.

Technical Data


Material:
 Metal parts: Steel, HCP
 Grub screws, nuts: Steel, HCP
 Clamping hooks: Cast iron, HCP

Approvals

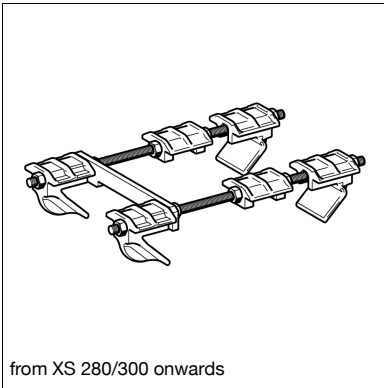



from XS 280/300 onwards

Type	W [kg]	Qty. [set]	Part number
XS 80/120	2.3	1	110357
XS 140/160	2.4	1	110358
XS 180/220	2.4	1	110359
XS 240/260	2.5	1	110360
XS 280/300	3.0	1	110361
XS F 80	1.4	1	110356

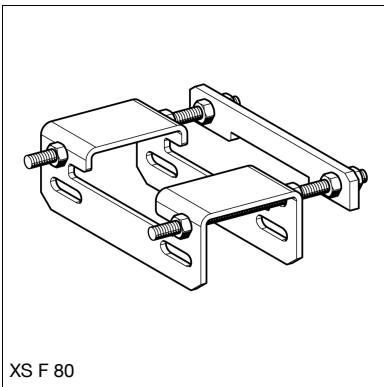

XS F 80

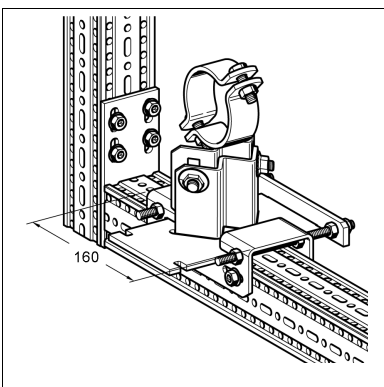

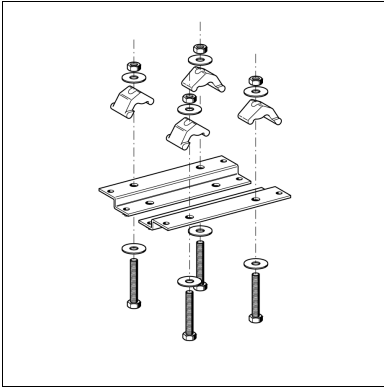

Guiding Set FS Z

Application


For suspension of a Guided Support from a Simotec Beam Section 100 resp. 120 or another steel girder with a flange width of 100 up to 120 mm.

Configuration

Two identical guide rails and Assembly Set P2.

Installation

The guide rails are to be fixed with Assembly Set P2 below the beam with 2mm clearance to the support at the side. Torque for the M12 bolts of the Assembly Set = 85 Nm.

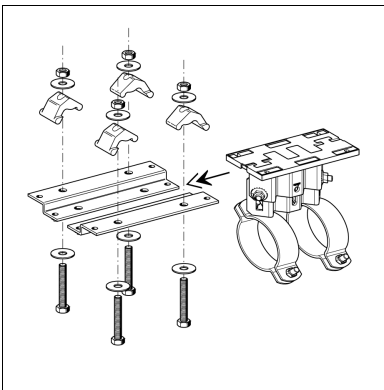

Technical Data


Material:




Metal parts: Steel, HCP
 Grub screws, nuts: Steel, HCP

Approvals



Type	W [kg]	Qty. [set]	Part number
FS Z 80/120	3.6	1	110398

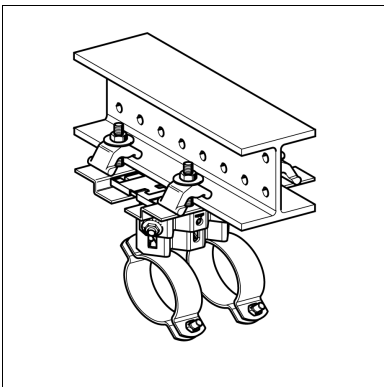

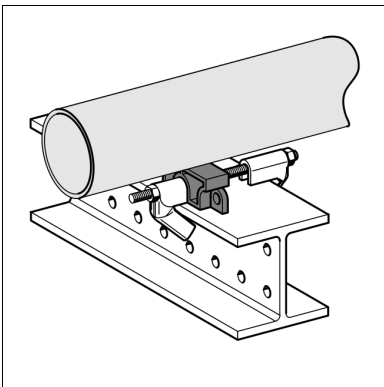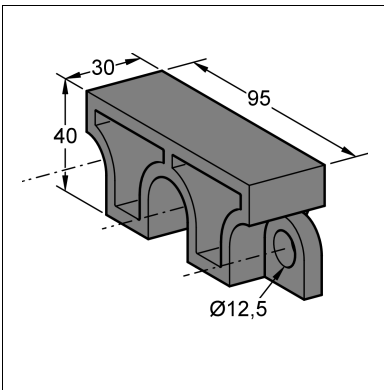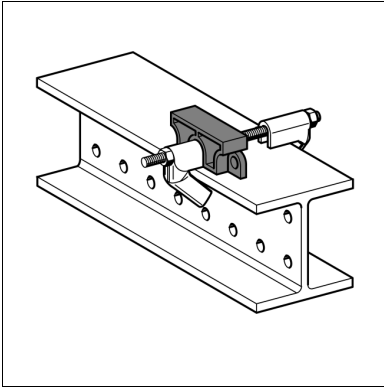

Sliding Support LU - H 40

Application

Serves as a base for pipes, to be fixed on steel beams with minimum flange width of 80 mm. For pipe sizes up to NB 150, one PA block is sufficient. For pipes of NB 200 up to 300, two blocks are to be bolted together to provide a bigger rest (any number of PA blocks can be lined up).

Configuration

NB 25 up to NB 150: 1 PA block and 1 Clamping Set

NB 200 up to NB 300: 2 PA blocks and 2 Clamping Sets

Clamping sets contain:

2 Clamping Hooks C

1 Grub Screw M12 x 200

3 Nuts M12

▷ When attaching to beams with flanges wider than 120 mm, longer bolts have to be used.

Installation

The pipe slides directly on the 40 mm high PA blocks. The lateral guide of the pipe has to be provided by other means. From DN 200 on, pre-assemble the PA blocks using a M12 x 30 hexagon bolt and a hexagon nut first.

Technical Data

NB	H [mm]	Clamping Sets [Pcs.]	PA blocks [Pcs.]
DN 25 - 150	40	1	1
DN 200 - 300	40	2	2

Material:


Clamping Hooks Steel HCP

Grub screws, nuts Steel, HCP

PA block Polyamide 6.0, 30 % glass fibre reinforced, black

Temperature range -20 to +130° C (at the PA block)

Type	For pipes of dia. [mm] from ... to	W [kg]	Quantity [pack]	Part number
LU - H 40 DN 25 - 150	33.7 - 168.3	0.7	1	164241
LU - H 40 DN 200 - 300	219.1 - 323.9	1.4	1	164250

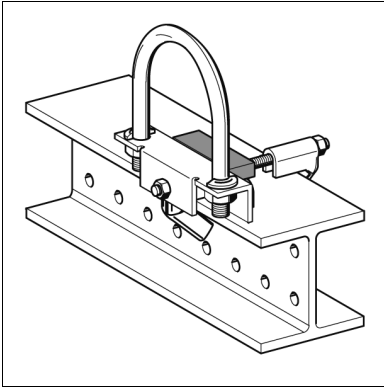

Guided Support FR - H 40

Application

Guided Support for attachment on steel beams with minimum flange width of 80 mm.

Configuration

U-Bolt with welded-on semi-washers and 2 hexagon nuts, U-profile (bended metal) with PA block(s) resp. impressed PA base.


Accessories per Clamping Set:

2 Clamping Hooks C

1 Grub Screw M12 x 200

3 Nuts M12

▷ For attachment to beams with flanges wider than 120 mm, longer bolts have to be used.

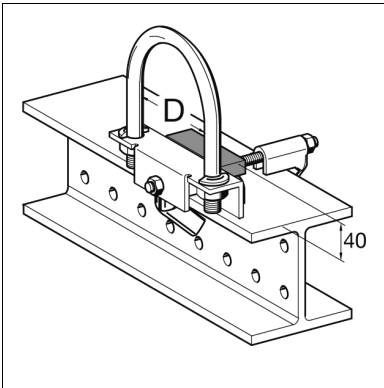

Installation

The pipe slides on the PA block resp. the PA base, which is slightly higher than the U-profile (approx. 1 mm).

Technical Data

Material:


U-Bolt DIN 3570, HCP

Metal parts Steel, HCP


Grub screws, nuts Steel, HCP


PA-block Polyamide 6.0, 30 % glass fibre reinforced, black

Temperature range: -20 to +130° C (at the PA block)

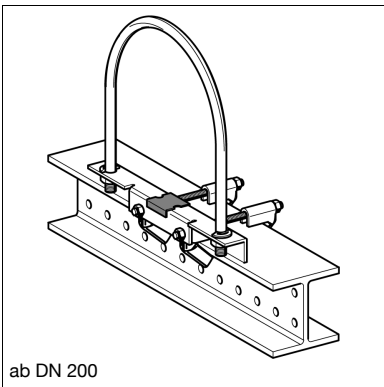

Type	D (pipe) [mm]	W [kg]	Quantity [pack]	Part number
FR - H 40 DN 25	33.7	1.1	1	164269
FR - H 40 DN 32	42.4	1.1	1	167891
FR - H 40 DN 40	48.3	1.1	1	164278
FR - H 40 DN 50	60.3	1.2	1	164287
FR - H 40 DN 65	76.1	1.3	1	167907
FR - H 40 DN 80	88.9	1.4	1	164296
FR - H 40 DN 100	114.3	1.8	1	164302
FR - H 40 DN 125	139.7	2.0	1	164311
FR - H 40 DN 150	168.3	2.2	1	164320
FR - H 40 DN 200	219.1	4.2	1	164339
FR - H 40 DN 250	273.0	4.8	1	164348
FR - H 40 DN 300	323.9	5.4	1	164357

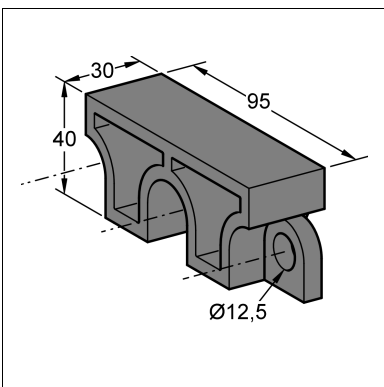

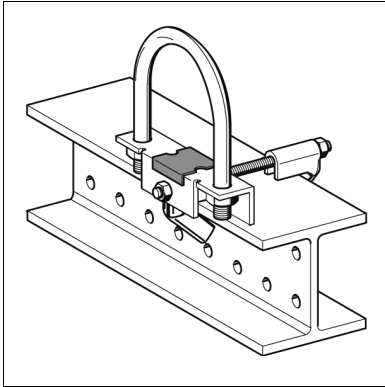

Fixed Point XR - H 40

Application

Fixed Point for attachment on steel beams with minimum flange width of 80 mm.

Configuration

U-Bolt with nuts, U-profile, PA block and Clamping Set(s)


Accessories per clamping set:

2 Clamping Hooks C

1 Grub Screw M12 x 200

3 nuts M12

▷ When attaching to beams with flanges wider than 120 mm, longer bolts have to be used.

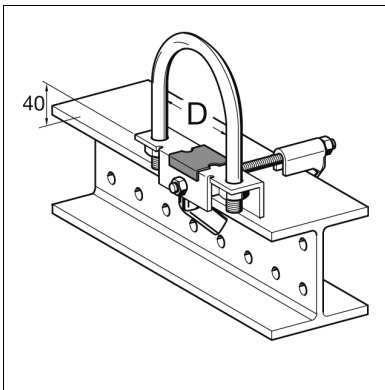

Installation

The pipe weight presses the pipe into the PA block to such an extent that, in working condition, the lower edge of the pipe is at about 40 mm.

Technical Data

Type	H [mm]	Clamping Sets [Pcs.]
DN 25 - 150	40	1
DN 200 - 300	40	2

Material:

U-Bolt

DIN 3570, HCP

Metal parts:

Steel, HCP

Grub screws, nuts

Steel, HCP

PA block

Polyamide 6.0, 30 % glass fibre reinforced, black

Temperature range

-20 to +130° C (at the PA block)

Type	D (pipe) [mm]	W [kg]	Quantity [pack]	Part number
XR - H 40 DN 25	33.7	0.9	1	164366
XR - H 40 DN 32	42.4	1.0	1	167916
XR - H 40 DN 40	48.3	1.0	1	164375
XR - H 40 DN 50	60.3	1.1	1	164384
XR - H 40 DN 65	76.1	1.2	1	167925
XR - H 40 DN 80	88.9	1.3	1	164393
XR - H 40 DN 100	114.3	1.7	1	164409
XR - H 40 DN 125	139.7	1.9	1	164418
XR - H 40 DN 150	168.3	2.1	1	164427
XR - H 40 DN 200	219.1	3.5	1	164436
XR - H 40 DN 250	273.0	4.5	1	164445
XR - H 40 DN 300	323.9	5.0	1	164454